
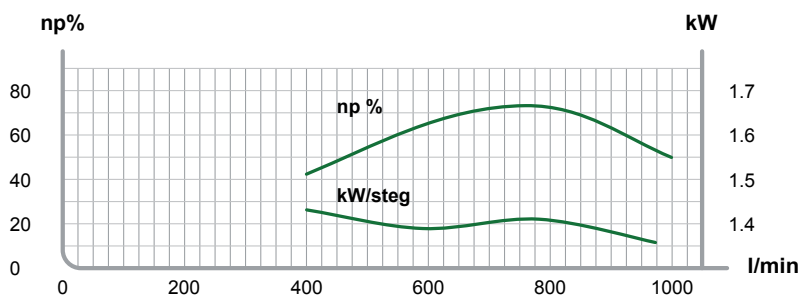


Senkepumpe DX 46

Teknisk beskrivelse

Dx 46 brukes der man trenger litt mer vann som for eksempel landbruk, industri eller varmpumpeanlegg. Franklinmotoren sørger for meget lang levetid.

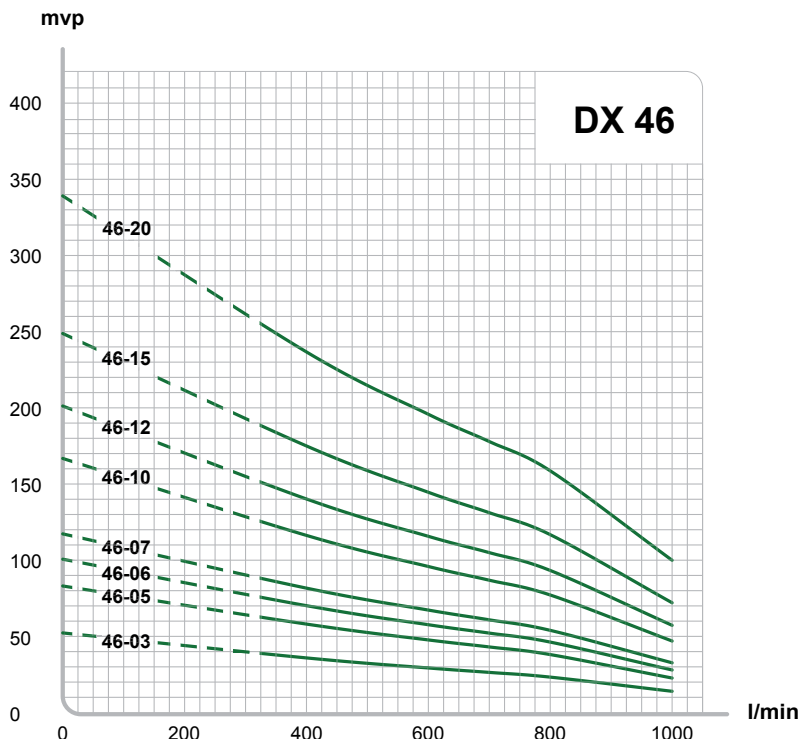

Tekniske data

Modell	Motor kW	Driftstrøm		Hmaks mvp	Qmaks L/m	Lengde mm	Vekt kg
		230V	400V				
46-03	5.5	23.7	12.5	52	1000	1257	56
46-05	7.5	28.2	16.0	83	1000	1519	65
46-06	9.3	36.0	20.7	101	1000	1667	70
46-07	11.0	40.4	23.3	117	1000	1814	73
46-10	15.0	54.2	31.3	167	1000	2224	84
46-12	18.5	66.7	38.5	201	1000	2519	95
46-15	22.0	66.7	45.3	249	1000	2930	109
46-20	30.0	78.5	63.5	339	1000	3635	129

Produktinformasjon

Materialer

Ytterskall:	Rustfritt, Aisi 304
Hjul og diffusorer:	Rustfritt, Aisi 304
Mellomstykke:	Rustfritt, Aisi 304
Tilkobling:	Rustfritt, Aisi 304

Motordata

Spenning:	3 x 230V 3 x 400V
Kapslingsklasse:	IP 68
Maks spenningsdifferanse:	+/- 5%
Maks antall starter:	20/time

Øvrige data

Minste brønnndia:	152 mm
Tilkobling:	3"
Maks vanntemperatur:	30°C

Kontaktinformasjon

E.M.S. Teknisk AS	Telefon: 33 33 11 33
	Faks: 33 33 11 20
Basbergveien 160	ems@ems.no
3114 TØNSBERG	www.ems.no